

Specifications:

| | |
|-----------------------------------|--------------------------------|
| Power Output: | 60 watts RMS x 2 into 4 ohm |
| Total Harmonic Distortion: | <0.01% @30W <0.1% @60W |
| Minimum Speaker Impedance: | 4 ohm |
| Signal-to-Noise Ratio: | 103 dB, A weighted |
| Input Impedance: | 2 k ohm \pm 5% |
| Frequency Response: | 20-20,000 Hz |
| Channel Separation: | 95 dB |
| Efficiency: | 85% |
| Dynamic Range: | >100 dB |
| Electrical Requirement: | 24VDC @ 5A center pin positive |
| Dimensions: | 2" H x 3.375" W x 6.250" D |
| Weight: | 1.0 lbs |

Package Contents:

- DTA-120 120W Digital Class T Amplifier
- World compatible 24V@5A switch mode power supply
- 2 sets of screw-type banana plugs for speaker connection
- 3.5mm to 1/4" headphone adapter
- 3.5mm to 2 RCA "Y" cable
- 6" coiled 3.5mm audio input cable

Important Safety Instructions

To reduce the risk of electric shock, do not remove cover. No user serviceable parts inside. Refer servicing to qualified personnel. To reduce the risk of fire and shock do not expose unit to rain or moisture. The unit should be connected to an earth grounded AC electrical socket. The unit should be operated in a well ventilated area. Minimum clearance is 2 inches from the ventilation openings.




Warranty

The Dayton Audio DTA-120 is warranted free from defects in material and workmanship for one year from date of purchase. Warranty does not apply to misuse, abuse, neglect, accident, improper use, etc. Note: If an inappropriate power supply is used and the unit is damaged, the warranty will be voided.



120 Watt Class T Digital Audio Amplifier

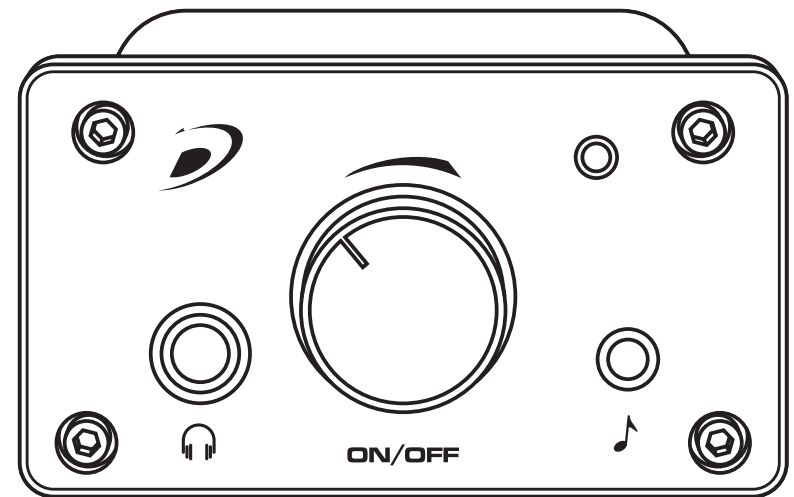

Model: DTA-120

User Manual

www.daytonaudio.com

Thank you for purchasing the Dayton Audio DTA-120 Class T Digital Audio Power Amplifier. This amplifier features the Tripath TK2050 chipset that provides 60W continuous power per channel (120W total) into an 4 ohm load. Class T amplifiers using Tripath's proprietary Digital Power Processing™ technology offer the audio fidelity of a Class AB amplifier while providing the power efficiency of a Class D.

Features:

- 60W per channel RMS (120W total) into an 4 ohm load
- Audiophile quality sound with less than 0.01% THD @ 30W
- ¼" Headphone jack allows the unit to double as a high fidelity headphone amplifier
- Convenient front mounted 3.5mm input for quick connection of portable audio devices
- Compact extruded aluminum housing with thick black anodized faceplate
- Rear mounted RCA-type input for permanent connection of larger audio devices
- Short circuit, thermal, and overload protection

Front Panel:

1. Power LED

Blue power LED indicates the unit is receiving power and is fully operational.

2. Power / Volume control

This control turns on the unit and adjusts the volume level of the amplifier. When the unit is turned on the power LED will become fully illuminated. To turn the unit off, turn the control fully counter clockwise until it "clicks" to the off position. It is normal for the power LED to slowly dim and then go completely out when the unit is first turned off.

3. Headphone Jack

The DTA-120 also doubles as a headphone amplifier that will drive any headphone easily and delivers colossal sound stage and effortless dynamic range. The ¼" stereo jack allows connection of larger home and studio-style headphones. An adapter is also provided so that smaller 3.5mm personnel style headphones can be used.

Note: When headphones are plugged into the headphone jack the speaker output connections are disconnected.

4. 3.5mm Audio Input

The unit features a convenient front mounted 3.5mm stereo input for quick connection of iPods, MP3 players, and other portable audio devices. A 6" 3.5mm coiled cable that stretches to 12" is included.

Note: When a device is plugged into the 3.5mm audio input the rear mounted RCA input jacks are disconnected. This allows the user to permanently connect a device to the rear RCA audio inputs and switch to a portable device by simply plugging into the front mounted input.

Rear Panel:

5. Power Connection

The DTA-120 operates on 24VDC and MUST be used with a power supply that can provide at least 5A. A world compatible (100V-240V) switch mode power supply is included with the unit and is supplied with a U.S.A. style cord. To operate in other countries an appropriate power cord will need to be purchased. The power connection on the unit is a 2.5mm x 5.5mm jack with center pin being positive. **Note:** If an inappropriate power supply is used and the unit is damaged, the warranty will be voided.



6. Speaker Outputs

The speaker output connections utilize high current binding posts that are spaced on ¾" centers and are compatible with standard double banana plug connectors (sold separately). The connections are color coded for easy polarity identification. High quality screw-on banana plugs that will accept 10AWG-18AWG wire are included.

7. RCA-Type Audio Input

RCA-type line level input for permanent connection of larger devices such as CD players, PCs, and DVD players. An RCA to 3.5mm adapter is also provided for added connection flexibility. **Note:** When a device is plugged into the front mounted 3.5mm input, the RCA input jacks are disconnected.

Front Panel

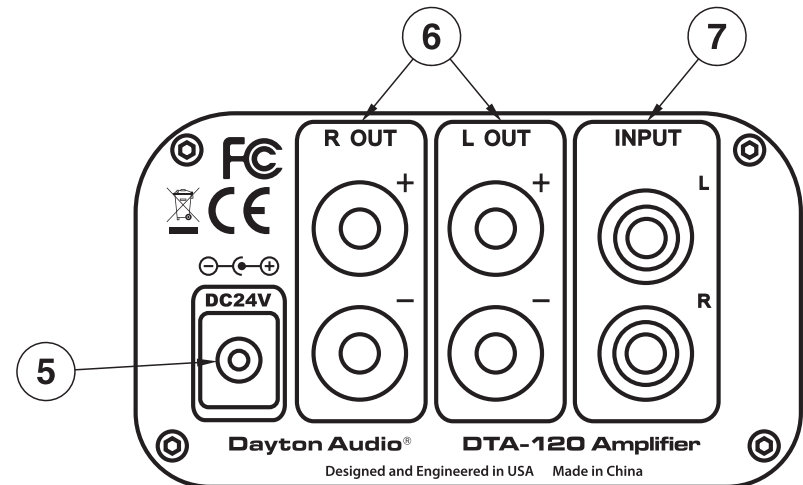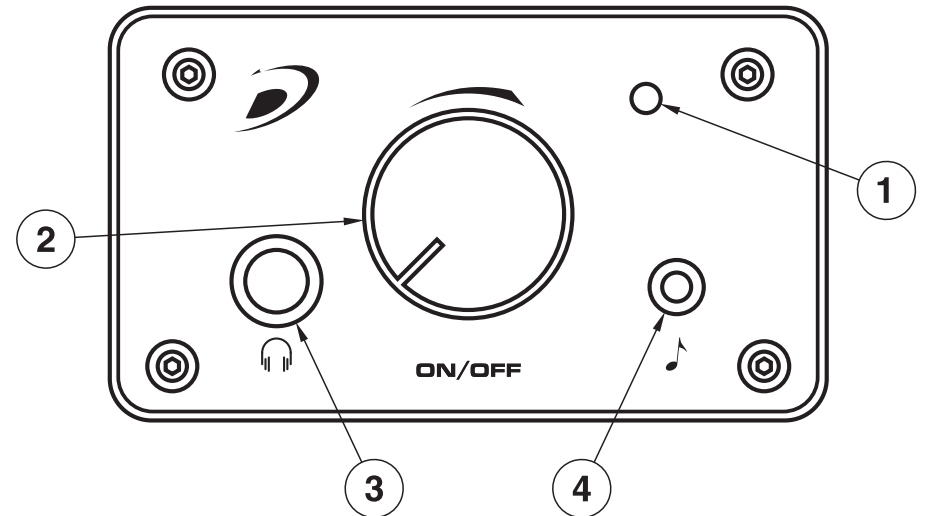

Rear Panel